



Fast Recovery Capability on Low Pressure Chillers

Fast Recovery Rates

- Transfers 100-lbs/min push pull and 0.66-lbs/min vapor on R11. Water-cooled plate exchanger provides excellent condensing capacity.

Noncondensibles? Not an Issue!

- Rugged 2.0-hp open drive compressor tolerates noncondensibles better than a vacuum pump.

Easy Operations

- Evacuating lines and switching from liquid to vapor recovery modes simply involves turning three 3-way hand valves & rerouting one hose.

Specifications

Push/Pull Rates (R11)	100-lbs/min
Vapor Rates (R11)	0.66-lbs/min
Connections	3/4" flare or optional quick connects
Dimensions - Inches: l x w x h	23 x 27 x 34
Weight	160-lbs/73-kg (210-lbs/96-kg shipping)
Float Connection	3-pin BH
Low Pressure Switch	29" Hg
Certifications	Certified by ETL to UL-1963 standards Rated in accordance with ARI Standard 740-1998


Included with purchase

One 48-cubic inch drier core	Two 3/4" x 10ft & One 3/4" x 20ft Recovery Hoses
50-ft power cord	12-ft tank float cable
	Two 3/4" swivels

Order number	Power options	Controls / cooling options
CRL-115-E	103-127V, 50/60Hz, 1Ph, 2Hp, 15A	Electromechanical , water cooled – R11, R123, R113
CRL-115-E-R114	103-127V, 50/60Hz, 1Ph, 2Hp, 15A	Electromechanical , water cooled – R114 service only
CRL-240-E	220-240V, 50/60Hz, 1Ph, 2Hp, 15A	Electromechanical , water cooled – R11, R123, R113
KIT001	Quick connect kit for Lovac unit & hoses	



3/4" flare connections with isolation ball valves are supplied as a standard feature...

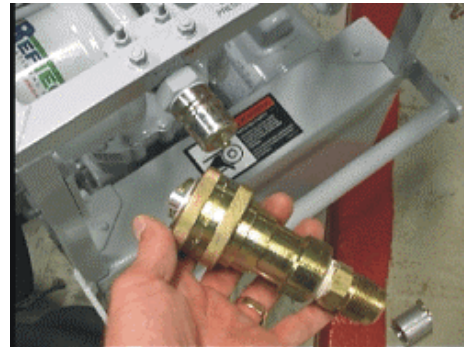

...Quick connect kit (KIT001) may be purchased separately & installed to flare connections on Lovac & hoses.

RefTec International, Inc.
10530 Portal Crossing W, Suite 104
Bradenton, FL 34211

Tel: 800-214-4883
Sales fax: 941-750-0222
www.reftec.com
email: sales@reftec.com